

STANDARD FEATURES and ACCESSORIES



	HS221ML	HS221CM
Sensor Mount Type	Manually Adjustable Single Column Floor Mount	Manually Adjustable Mobile Cabinet Mount
Power Requirements	Supplied by console	Supplied by console
HD Targets	✓	✓
Self-Centering	✓	✓
Vertical Camera Adjustment	✓	✓
Mobile - Bay-to-Bay		✓
High Definition Cameras	✓	✓
Multiple Target Storage Configurations	✓	✓

SPECIFICATIONS / MEASUREMENTS / ADJUSTMENTS




SPECIFICATIONS	
Weight of Target	11 lbs. (5 kg)
Profile of Target	18 in. (457 mm)
Installation Time	10 - 15 seconds
Rolling Compensation Style	Back / Forward
Camera Resolution	2,608 x 1,952 10,000,000 px
Track Width	80 in. (2032 mm)
Wheel Base	210 in. (5334 mm)
Distance to Wall	65 - 97 in. (1651 - 2464 mm)
Suggested Distance	97 in. (2464 mm)
Short Bay Distance (see site info)	65 in. (1651 mm)

MEASUREMENTS	ProAlign®
S.A.I. & Included Angle	✓
Set Back	✓
Max Steering Angle	To Lock
Wheelbase Difference	✓
Track Width Difference	✓
Lateral Offset	✓
Rear Set Back	✓
Axle Offset	✓


Continued on Page 2



VERTICALLY ADJUSTABLE CAMERA SENSORS DIMENSIONS / SPECIFICATIONS

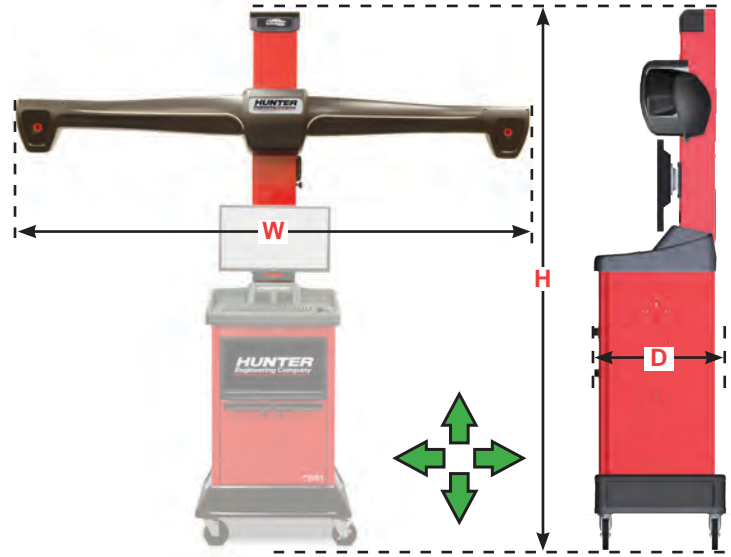

	HS221ML	HS221CM
Width (W)	105 in. 2667 mm	105 in. 2667 mm
Height (H)	122.5 in. 3112 mm	105.5 in. 2680 mm
Depth (D)	15 in. 381 mm	25 in. 635 mm
Vertical Camera Movement Range	56 - 113.5 in. 1422 - 2883 mm (from floor)	60 - 95.5 in. 1524 - 2426 mm (from floor)

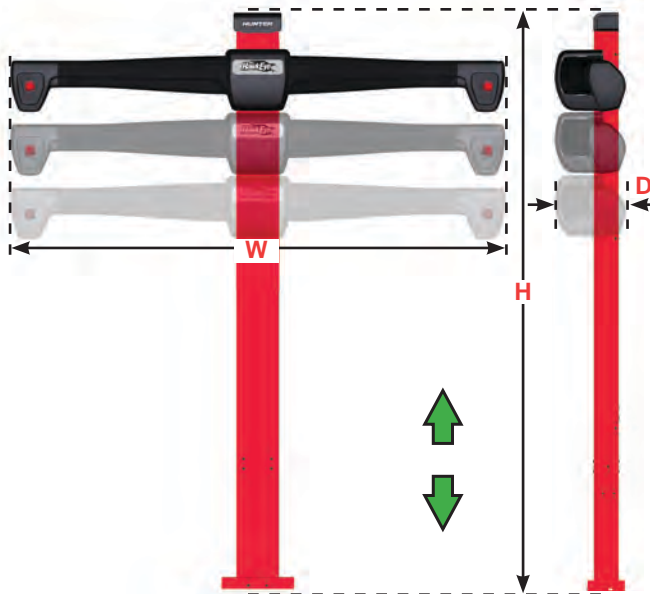

Continued on Page 3

HS221 Series Sensors




INCLUDED WITH ALL HS221 SENSORS


High Definition Targets



Target Storage Brackets

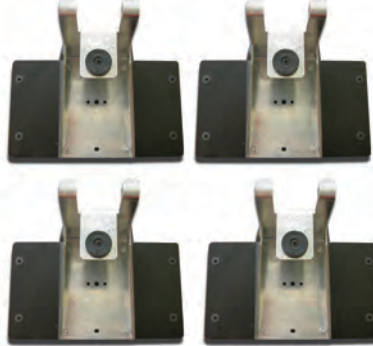

Wheel Adaptors

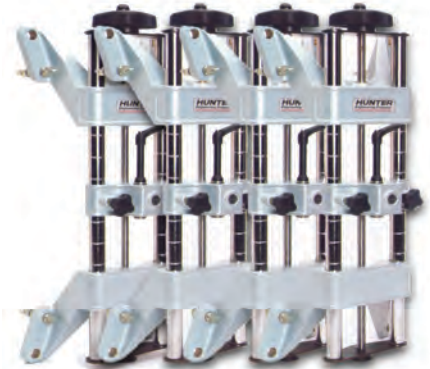

CONSOLE OPTIONS



For aligner information visit:
www.hunter.com/alignment

For local contact visit:
www.hunter.com/contact-hunter

For general inquiries visit:
www.hunter.com or call 800-448-6848

Because of continuing technological advancements, specifications, models and options are subject to change without notice.

Form 7025-T, 11-15
Copyright © 2015, Hunter Engineering Company